


# SCHOPF F160 Aircraft Tow Tractor




# **Technical data SCHOPF F160**

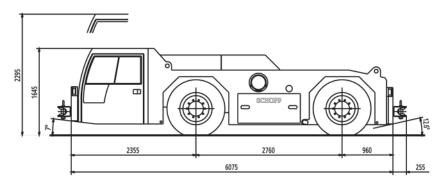

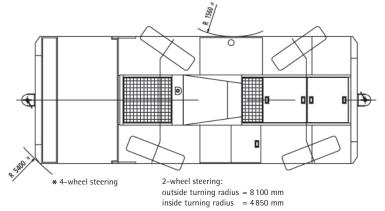





#### General data

- Operating weights
  - 16 000/18 000/20 000/22 700/25 000 kg
- Drawbar pull (installed) 180 kN (40 465 lbs)
- Tyre size 16-22,7t 11.00x20 Tyre size 25t 12.00x20
- Lifting cabin

#### **Engine**

Water-cooled Deutz BF4M 1013 EC, Diesel, turbo-charged, 4-cylinders, in-line, exhaust gas emissions acc. to the latest standards, 118 kW (160 HP) at 2300 rpm, 577 Nm at 1400 rpm, 4764 cm³, integrated electronic engine management system (EMR) optionally: Water-cooled Deutz TCD2013 L04, Diesel, turbo-charged, 4-cylinders, in-line, exhaust gas emissions acc. to the latest standards, 129 kW (175 HP) at 2300 rpm, 670 Nm at 1600 rpm, 4764 cm³, integrated electronic engine management system (EMR)

#### Transmission

ZF ERGOPOWER series 6 WG 160, fully automatic full-power-shift transmission, reversing, integrated torque converter, electro-hydraulic gear shifting, 6 gears forward, 3 gears reverse

#### **Brakes**

Fully hydraulic 3-circuit safety disk brake system with accumulator backup:

- 2-circuit service brake
- 1-circuit failsafe parking/emergency (spring on hydraulic pressure release) brake
- Circuit protection valves for safe braking in case of main hydraulic pump failure

### Steering system

Hydraulic Orbitrol steering system with electrically selected and return-to-centreline control modes:

- Front wheel
- Rear wheel


- 4 wheel co-ordinated
- Crab steering (option)
- Emergency steering pump

# Electric system

- Alternator 28 V / 55 A
- Battery capacity 2 x 12 V / 110 Ah
- Engine starter 4 kW
- 2 headlights, low and high beam
- 2 reversing lights
- 2 brake lights
- 2+2 directional indicator lights (front+rear)

## **Options**

- Open driver's stand
- Various tow hitches
- Air-conditioning
- Winterization kits
- Heating systems
- Cabin-roof light barrier or antenna sensor
- Rear-view video camera
- And more...

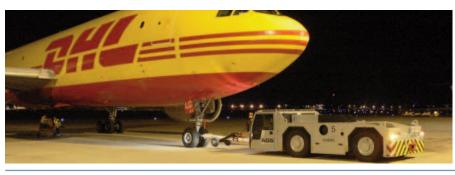

Tolerance of mentioned data +/- 3%. Specifications subject to change without notice. Drawings and pictures may include options.