

GPU type GA60

Ground Power Unit type GA60
60kVA – 115/200V - 400Hz



Simply

- ➔ Compact
- ➔ Light
- ➔ Performant
- ➔ Economical

Characteristics

AC output	
Rated Power	60kVA at power factor 0,7
Voltage	115/200V three phases + neutral
Voltage regulation	± 1%
Voltage transient	±3V <200ms, under load impact 0-80% or 80%-0
Frequency	400 Hz
Frequency regulation	± 1Hz
Frequency transient	±10Hz < 2s, under load impact 0-80% or 80%-0



GUINAULT SA
 PAOS La Saussaye
 F - 45590 Saint-Cyr en Val
 Tél : +33 (0) 2 38 63 84 00
 Fax : +33 (0) 2 38 69 66 22
www.guinault.com



Engine

- Deutz type BF4L2011
- Turbo diesel,
- Integrated oil-cooling
- Speed: 2667 rpm
- Electronic speed regulator
- Batteries: 2 x 12V-50Ah

Bi-Alternator

- Guinault type AS180
- Three phases 400Hz, 115/200V
- 18 poles, brushless
- Electronic voltage regulator Guinault type RS654

Safeties

Electrical

- Over Voltage
- Under Voltage
- Over Frequency
- Under Frequency
- Over Load

Engine

- High Temperature
- Low Oil Pressure
- Air Filter Clogging
- Battery charging default
- Over Speed

Output

- one AC output 115/200V-400Hz, length 10 m. + socket ISO461 / Stanag 3303



Main assembly

- Steel frame, anti-corrosion coating
- Polyester canopy
- Leading front axle with ball bearing
- Automatic braking when tow-bar is raised or lowered
- Inflate tyres 16.5x6.5-8
- Cables compartments on each side of the unit
- Fuel tank 70 litres

Options

- Second 115/200V-400Hz output
- 400Hz single phase output
- Cold start aid,
- Mounting on pick up...

Dimensions

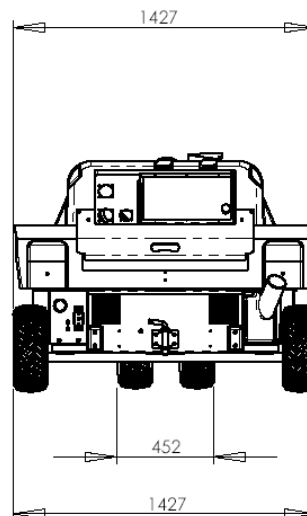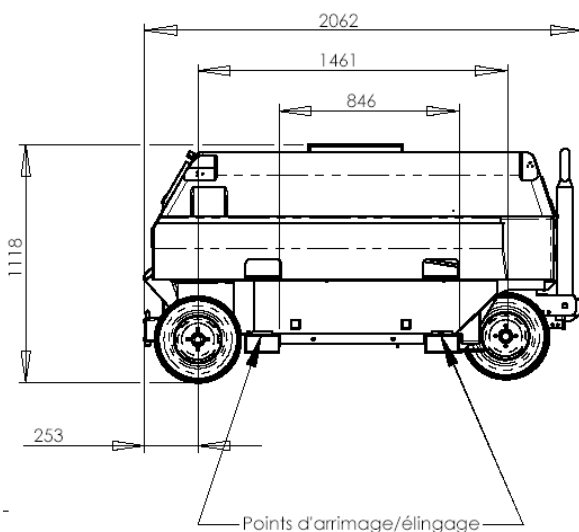

Weight: 1100 kg



PAOS La Saussaye
 F - 45590 Saint-Cyr en Val
 Tél : +33 (0) 2 38 63 84 00
 Fax : +33 (0) 2 38 69 66 22

info@guinault.com